


FRONT VIEW

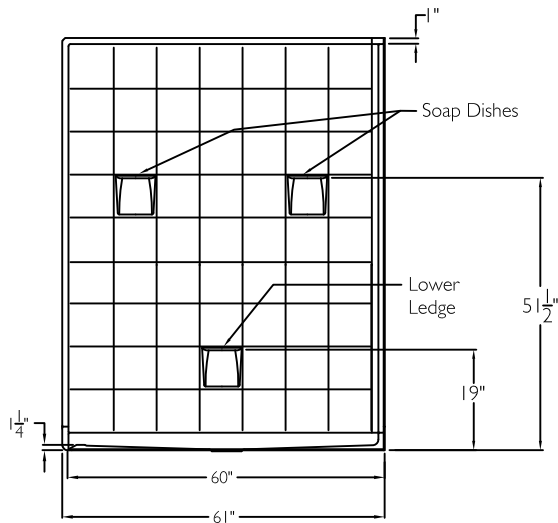


SUBMITTAL

This shower enclosure shall be model XST 6060 BF 3P DE 1.25" center. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.


The unit shall have outside dimensions of 61" x 61" x 78".

The unit shall meet ANSI Z124.1-2, HUD, BOCA, NAHB, UPC, and shall meet the requirements of the Southern Building Code.

SIDE VIEW

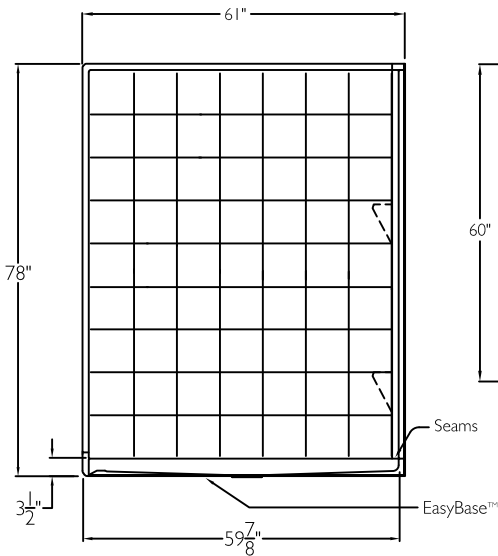


TOP VIEW

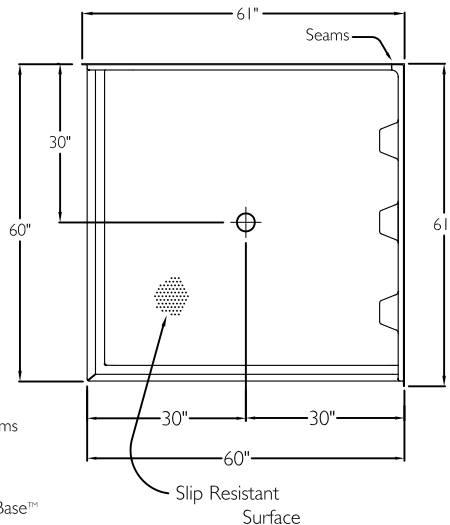

The enclosure shall be equipped with the following accessories:

- 1) Double entry threshold, 2) three piece sectional design,
- 3) Three molded soap ledges, two high, and one ledge low on one wall panel,
- 4) tile finish,
- 5) full wood backing on all walls,
- 6) Self locating aluminum guide pin wall interlocking system,
- 7) Low profile 1/4" change of level threshold,
- 8) EasyBase™ self sustaining bottom.

CROSS SECTION OF THRESHOLD

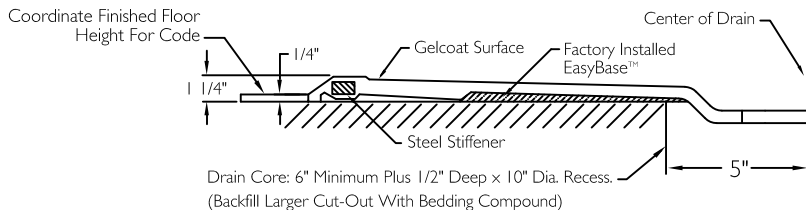

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 61" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

Job Name	Approved By	Name	Date	COMFORT DESIGNS		
Project No	Architect			Model No. XST 6060 BF 3P DE .25- C-1		
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfordesignsbathware.com	Engineer			Drawing No. XST 6060 BF 3P DE 1.25 FWB EB		
	Rep			Date Issued. 4-21-12	Drawing Rev.	
	Wholesaler			Material. Gelcoat		
	Comments				Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"		