

INSTALLATION INSTRUCTIONS FOR FIXTURE #4645-579

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling including the mounting hardware.
2. Carefully remove the new fixture from the packaging and check that all parts are included as shown in the illustration.
3. Determine the desired hanging height and thread tubes (I & J) to the connectors (K) on top of the fixture body. Pass the wires carefully through each tube as you assemble.
4. Slide the rubber washers (H) over the nipples of tubes (I & J) and thread the loops (F) to top of the tubes (I & J).
5. Using quick links (G) hang fixture via loops (F) on bottom of canopy (D) and top of the tubes (I & J).

MOUNTING THE FIXTURE (Fig. 1)

6. Thread the mounting nipple (C) into crossbar (A), then secure with spring washer and hex nut.
7. Attach the crossbar (A) to the outlet box using the outlet box screws (B). The side of the crossbar (A) marked "GND" must face out.
8. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
9. After wires are connected, tuck them carefully into the ceiling junction box.
10. Attach the canopy (D) onto the outlet box by protruding mounting nipple (C) through mounting hole on the canopy (D) and secure with finial (E).
11. Install the T8 bulbs (M) (bulbs included) into the sockets (O). **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)).**
12. Insert the glass shades (L) into the cups (P).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.1

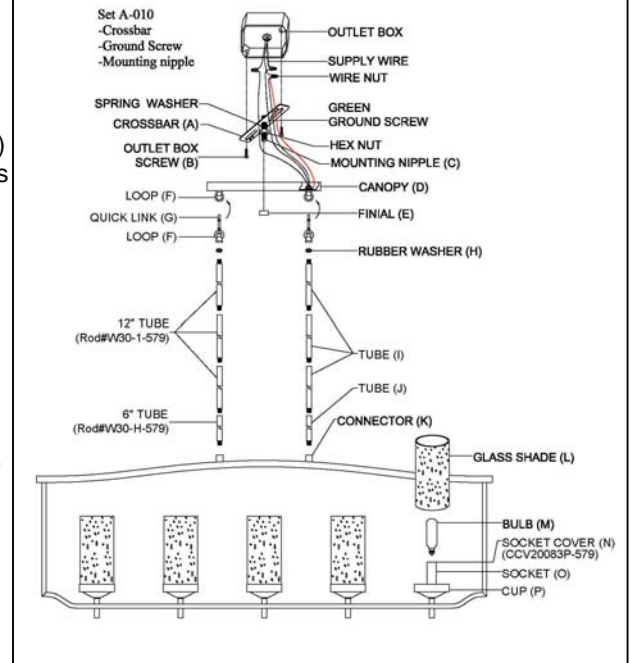


Fig.2

