


5035/5535

MANSFIELD®


Essence[™] 4272 71 ½" x 41 ½" x 24" Swirl-way[®] Whirlpool and Bathtub

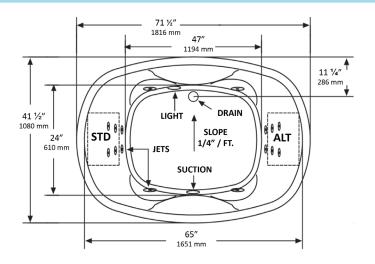

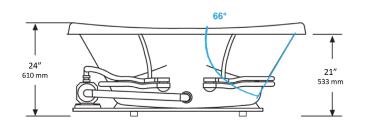



PLUMBING ROUGH-IN



NOTES:

- Pump locations shown for clarity. Specify when ordering STD Standard or ALT Alternate.
- 2. Required pump motor access is 20" W x 15" H.
- 3. Measurements may vary 1/4" (+/-)
- 4. Removable apron is not available for this unit.
- 5. These dimensions are nominal and subject to change without notice.

SPECIFICATIONS			
Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Warranty	Limited Ten Year
Construction	Self-contained, pre-plumbed whirlpool bath system mounted on a pre-leveled base	Water Capacity	70 gal. (min) 85 gal. (max)
Number of Jets	16	Shipping Weight	Whirlpool - 180 lbs
Floor Loading Weight	47 lbs. / sq.ft.		Bathtub - 160 lbs
ESSENTIALS PACKAGE		COMFORT PACKAGE	
Pump Motor	Single speed induction pump, 9 AMP	Pump Motor	Variable speed induction pump, 9 AMP
On/Off Control	One button on/off electronic keypad	On/Off Control	Multi-function electronic keypad
Electrical Requirements	One 120V, 20 amp GFCl dedicated circuit. Optional heater: separate 120 V, 20 amp dedicated circuit.	Electrical Requirements	Two separate 120 V, 20 amp dedicated circuits







