

DUO Wall Sconce

3-509-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-40 Aged Brass



-18 Gunmetal




-24 Satin Nickel



With optional backplate

LIGHT SOURCE 2 x 7W Max LED GU10 Base Socket (Lamp not included)
LUMINAIRE POWER 14.4W at 120V
RATED LIFE See LED bulb manufacturer specification
LUMEN OUTPUT Delivered: 761 lm (LM-79)**
INPUT VOLTAGE 120V
DRIVER OUTPUT N/A
CONSTRUCTION Plated Steel and Glass
DIFFUSER - Frosted Glass
FINISHES Gunmetal (-18), Satin Nickel (-24), Aged Brass (-40)
MOUNTING 2" x 3" J-Box, 4" Octagonal J-Box*, 4" Square J-Box with a single device mud ring
 *Backplate required to cover J-Box
STANDARDS UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.
 **Lumen Output may vary based on the lamp that is used

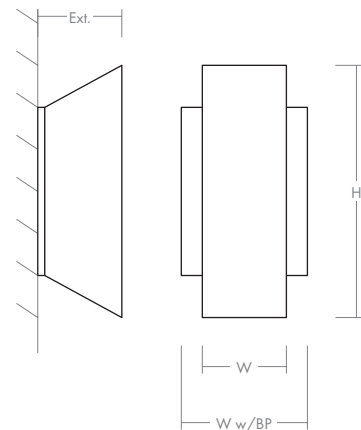

DIMENSIONS

W: 3.00"
H: 9.25"
Ext: 3.00"
M.C: 4.58" From top of fixture

With backplate

W: 4.75"
H: 9.25"
Ext: 3.12"
M.C: 4.58" From top of fixture

Order example for standard fixture:
3-509-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V

